



SSAS011R
Di.Pa.Sport RIGHT REAR AIR STRUT (COMFORT)
AUDI A8 (D3)



WARNING: The air suspension system is under pressure (up to 10 bar, or 150 lbf/in). Verify pressure has been relieved and disconnect power to the air suspension system prior to disassembly. Do not allow dirt or grease to enter the system. Always wear standard hand, ear, and eye protection when servicing the air suspension system.



SSAS011R
Di.Pa.Sport RIGHT REAR AIR STRUT (COMFORT)
AUDI A8 (D3)

GENERAL INFORMATION:

- Not to be stored below 5 °F (-15 °C) or above 122 °F (50 °C).
- Avoid damage to air lines and cables.
- Removal and installation is only to be performed by fully qualified personnel.
- Use car manufacturer's diagnostic software.

CAUTION: *Damage to the vehicle and air suspension system can be incurred if work is carried out in a manner other than specified in the instructions or in a different sequence.*



To avoid the possibility of short circuits while working with electric components consult your owner's manual on how to disconnect your battery.



Consult your vehicle owner's manual, service manual, or car dealer for the correct jacking points on your vehicle and for additional care, safety and maintenance instructions. Under no circumstances should any work be completed underneath the vehicle if it is not adequately supported, as serious injuries and death can occur.

AIR STRUT REMOVAL

1. SET STEERING TO STRAIGHT AHEAD.
2. RAISE VEHICLE.
3. REMOVE APPLICABLE REAR WHEEL. (FIGURE 1)



FIGURE 1



SSAS011R
Di.Pa.Sport RIGHT REAR AIR STRUT (COMFORT)
AUDI A8 (D3)

4. REMOVE FENDER WELL COVER TO ACCESS THE REAR STRUT. (FIGURES 2, 3)



FIGURE 2



FIGURE 3

5. LOCATE AND DISCONNECT THE ELECTRICAL CONNECTOR. (FIGURES 4, 5)

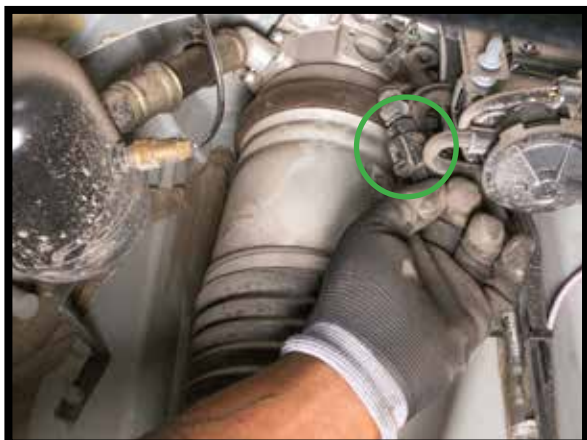


FIGURE 4

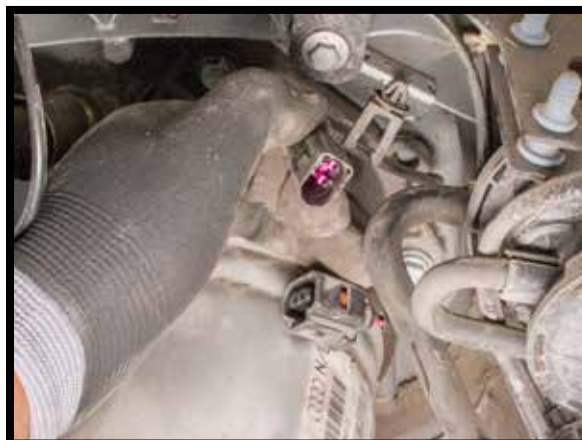


FIGURE 5

6. DISCONNECT AIR LINE FROM VOSS FITTING. (FIGURES 6, 7)

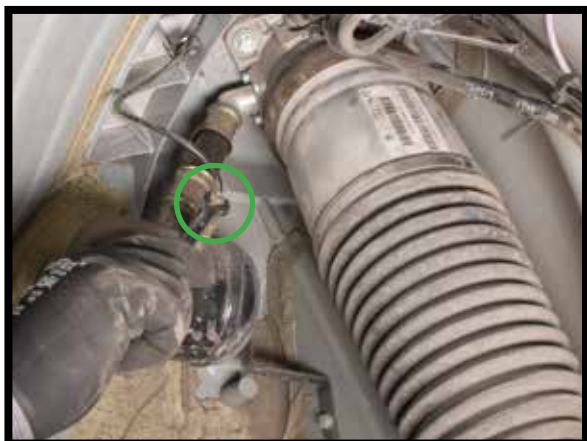


FIGURE 6



FIGURE 7



SSAS011R
Di.Pa.Sport RIGHT REAR AIR STRUT (COMFORT)
AUDI A8 (D3)

7. REMOVE (2) NUTS SECURING RESERVOIR BRACKETS TO VEHICLE. (FIGURE 8)



FIGURE 8

8. REMOVE (3) TOP BOLTS SECURING STRUT TO VEHICLE. (FIGURE 9)



FIGURE 9

9. REMOVE BOTTOM STRUT BOLT. (FIGURE 9)



FIGURE 9



SSAS011R
Di.Pa.Sport RIGHT REAR AIR STRUT (COMFORT)
AUDI A8 (D3)

10. DISCONNECT THE BRAKE LINE BRACKET AND RIDE HEIGHT SENSOR. (FIGURE 10, 11)



FIGURE 10



FIGURE 11

11. REMOVE SWAY BAR BOLT. (FIGURES 12, 13)



FIGURE 12



FIGURE 13

12. USING A BREAKER BAR FOR LEVERAGE, LIFT STRUT UP AND OVER THE UPPER CONTROL ARM. (FIGURE 14)



FIGURE 14



SSAS011R
Di.Pa.Sport RIGHT REAR AIR STRUT (COMFORT)
AUDI A8 (D3)

13. REMOVE STRUT FROM VEHICLE. (FIGURE 15)



FIGURE 15

14. REMOVAL COMPLETE.

AIR STRUT INSTALLATION



Tighten all nuts and bolts to manufacturer's specifications during the installation process.



Do not remove the air fitting from the air strut. Doing so may cause damage and/or void warranty.

1. INSTALLATION IS IN THE REVERSE ORDER OF AIR STRUT REMOVAL.
ADHERE TO ALL MANUFACTURE'S SPECIFICATIONS FOR TORQUE VALUES.